

Folding Tub Seats


with Solid Phenolic Surface

Architectural, Commercial,
Institutional, Residential

PHENOLIC SEAT

SPECIFICATION:

Folding tub seat manufactured by ELCOMA from 1" (25mm) diameter, 18 gauge, type 304 stainless steel tubing with #4 satin finish. Hinged mounting brackets shall be 12 gauge type 304 stainless steel. Solid Phenolic seat shall be 1/2" (13mm) thick and 4 7/16" (111mm) wide and shall be fire and mildew resistant. Seat shall swing up and be secured at the wall with a stainless steel hook. Rubber sleeves shall protect the tub in the "down" position. Seat unit shall comply with all applicable federal Local building and safety codes.

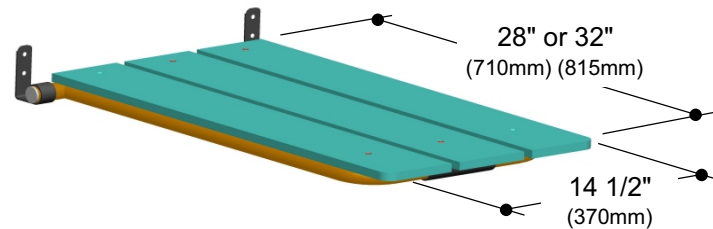

Custom sizes are available to suit special requirements.

28" X 14 1/2" (710 X 370 mm) seat	White	Model # 70-PH2801	(As Shown)
28" X 14 1/2" (710 X 370 mm) seat	Woodgrain	Model # 70-PH2815	(As Shown)
32" X 14 1/2" (815 X 370 mm) seat	White	Model # 70-PH3201	(As Shown)
32" X 14 1/2" (815 X 370 mm) seat	Woodgrain	Model # 70-PH3215	(As Shown)

The ELCOMA standard of product quality is supported by a **Lifetime Warranty** on all stainless components. Elcoma Two -Arm Seats have been designed and tested to withstand 250lbs. (114kg) * of load capacity when properly installed. This exceeds HUD, FHA, VA, ADA, ANSI and other federal and local codes. *

